


..... 3  
..... 3



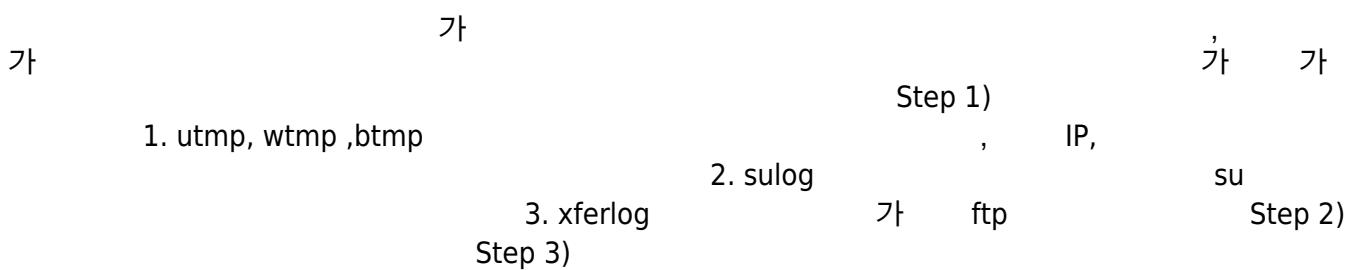

```

Step 1) vi          '/etc/syslog.conf'      #vi /etc/syslog.conf ※ CentOS 6.x
:rsyslog.conf Step 2)
*.info;mail.none;authpriv.none;cron.none /var/log/messages authpriv.* /var/log/secure mail.*
/var/log/maillog cron.* /var/log/cron *.alert /dev/console *.emerg * Step 3)           SYSLOG
#ps -ef | grep syslogd root 7524 6970 0 Apr 23 - 0:02 /usr/sbin/syslogd #kill -HUP [PID]
auth                                     authpriv
cron cron, at                           daemon telnet,
ftpd          kern          lpr
mail          news          syslog
syslog         user          uucp
local0

4 ( ) Emergency [emerg]      3 Alert [alert]
2 Critical [crit]           1 Error [err]
0 Warnning [warning]        -1 Notice [notice]
-2 Information [info]       -3 ( ) Debug [debug]

```

From:  
<https://atl.kr/dokuwiki/> - AllThatLinux!

Permanent link:  
[https://atl.kr/dokuwiki/doku.php/%EB%A1%9C%EA%B7%B8\\_%EA%B4%80%EB%A6%AC?rev=1641520031](https://atl.kr/dokuwiki/doku.php/%EB%A1%9C%EA%B7%B8_%EA%B4%80%EB%A6%AC?rev=1641520031)

Last update: 2022/01/07 01:47

