

<b>DNS</b>	<b>forwarder(resolver)</b>	.....	3
<b><i>forwarder</i></b>		.....	3




# DNS

# forwarder(resolver)

DNS 가 DNS resolving  
DNS

가 . forwarder

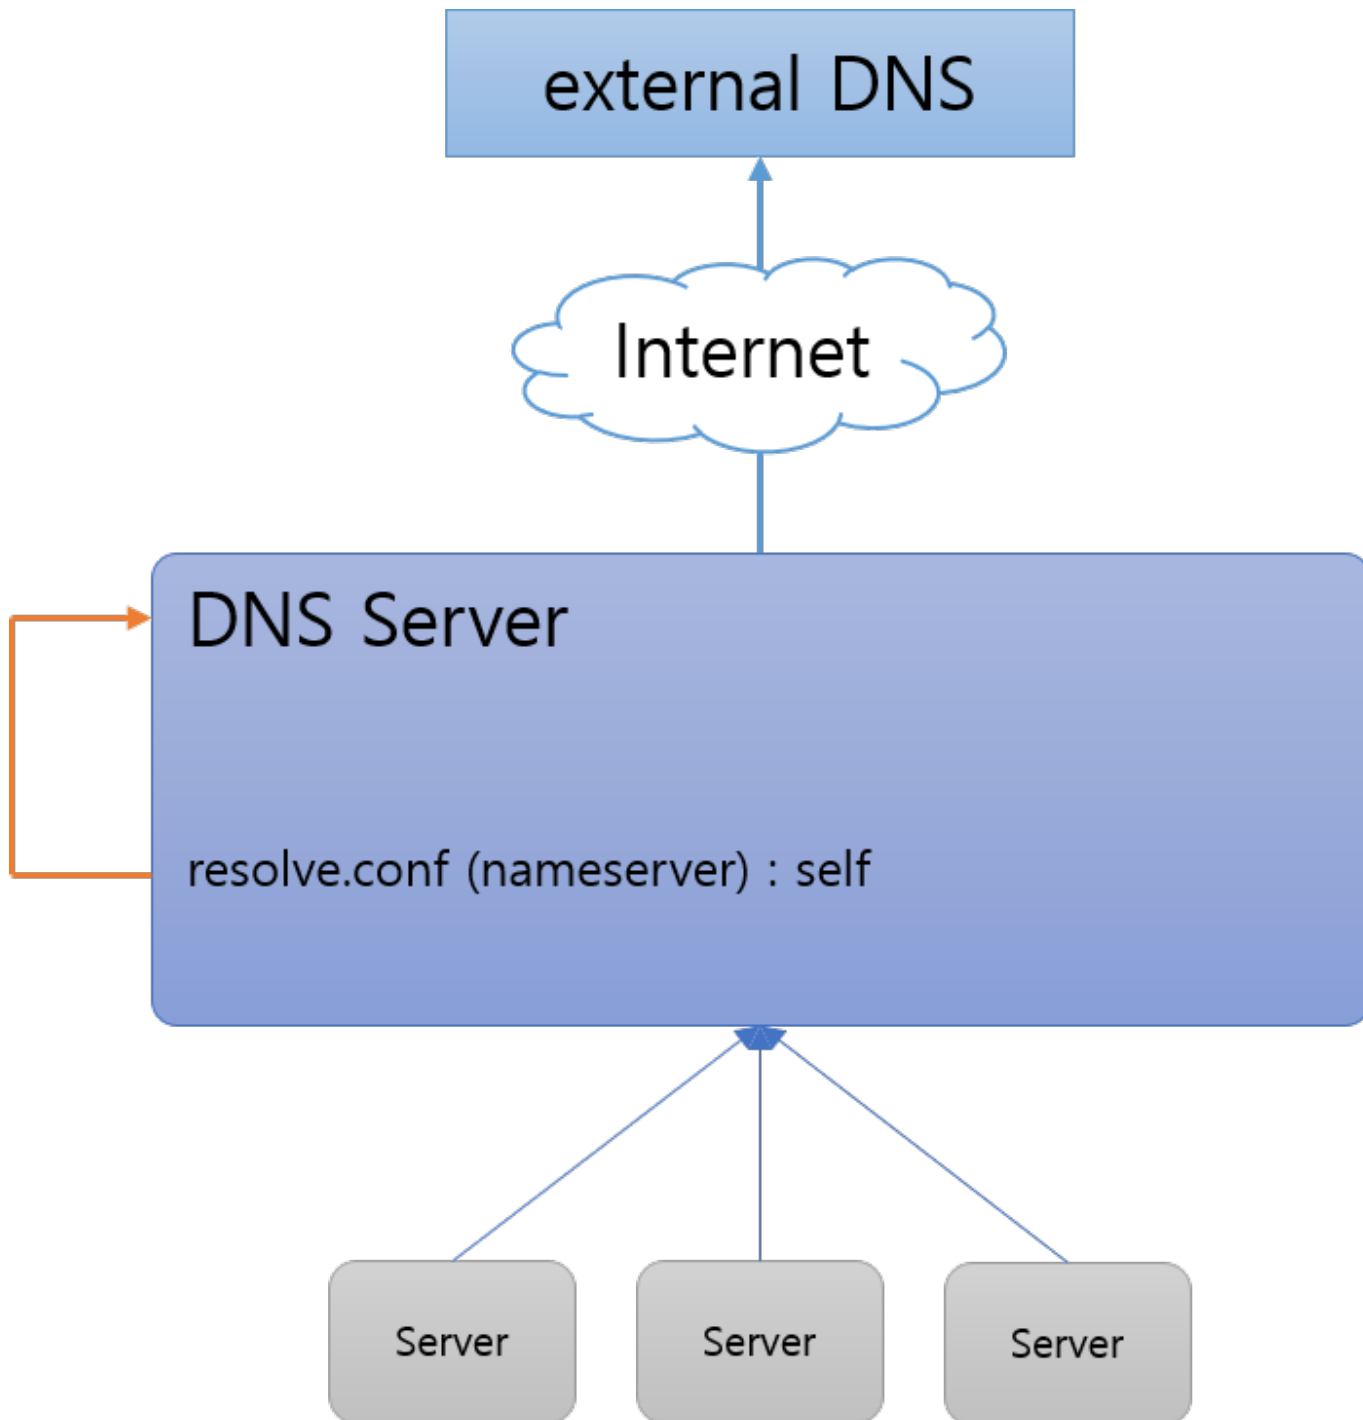

## forwarder

/etc/named.conf

```
options {
    directory "/var/cache/bind";

    recursion yes;                # enables resursive queries
    allow-recursion { trusted; }; # allows recursive queries from
"trusted" clients
    listen-on { 10.128.10.11; }; # ns1 private IP address - listen on
private network only
    allow-transfer { none; };    # disable zone transfers by default

    forwarders {
        8.8.8.8;
        8.8.4.4;
    };

    ...
};
```

From: <https://at1.kr/dokuwiki/> - AllThatLinux!

Permanent link: [https://at1.kr/dokuwiki/doku.php/dns\\_%EC%84%9C%EB%B2%84\\_%EC%9E%90%EC%B2%B4%EC%9D%98\\_forwarder\\_resolver\\_%EC%84%A4%EC%A0%95](https://at1.kr/dokuwiki/doku.php/dns_%EC%84%9C%EB%B2%84_%EC%9E%90%EC%B2%B4%EC%9D%98_forwarder_resolver_%EC%84%A4%EC%A0%95)

Last update: 2021/04/30 05:45

