

EAP 7

..... 3

..... 3

..... 4

eap_7_


Last update: 2024/04/09 08:00 - https://atl.kr/dokuwiki/doku.php/eap_7_%EC%9D%B4%EC%83%81%EC%97%90%EC%84%9C_%EC%BB%A8%ED%85%8D%EC%8A%A4%ED%8A%B8%EA%B0%84_%EC%84%B8%EC%85%98_%EA%B3%B5%EC%9C%A0

EAP 7

가 . JavaEE Servlet HttpSession Object

 **Session Scope** HttpSession objects must be scoped at the application (or servlet context) level.

가 .

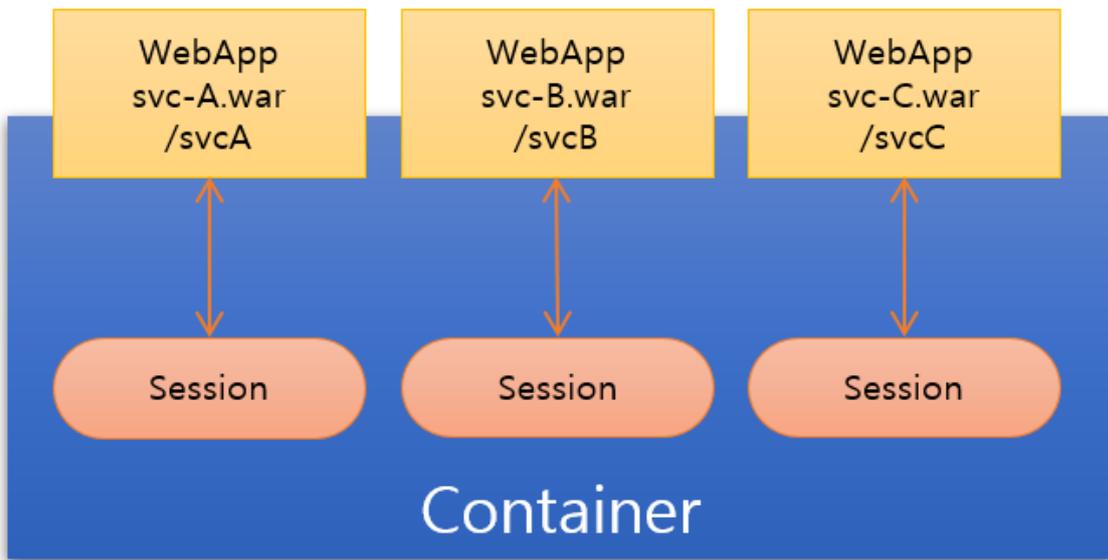

() . JavaEE Spec
가 .

가

WAS (Session Clustering) 가 .

WAS

JavaEE Spec .

JBoss EAP 7

config . EAR jboss-all.xml shared-session-

```
<jboss xmlns="urn:jboss:1.0">
  <shared-session-config xmlns="urn:jboss:shared-session-config:1.0">
    <session-config>
      <cookie-config>
        <path>/</path>
      </cookie-config>
    </session-config>
  </shared-session-config>
</jboss>
```

```
session-config:2.0 : <distributed/> shared-
```

```
<jboss xmlns="urn:jboss:1.0">
  <shared-session-config xmlns="urn:jboss:shared-session-config:2.0">
    <session-config>
      <cookie-config>
        <path>/</path>
      </cookie-config>
    </session-config>
    <distributed/>
  </shared-session-config>
</jboss>
```

- <https://access.redhat.com/solutions/18530>
- <https://access.redhat.com/solutions/2600141>
- https://access.redhat.com/documentation/en-us/red_hat_jboss_enterprise_application_platform/7.4/html/development_guide/class_loading_and_modules#configuring_session_sharing_between_subdeployments_in_enterprise_archives

From: <https://at1.kr/dokuwiki/> - AllThatLinux!

Permanent link: https://at1.kr/dokuwiki/doku.php/eap_7_%EC%9D%B4%EC%83%81%EC%97%90%EC%84%9C_%EC%BB%A8%ED%85%8D%EC%8A%A4%ED%8A%B8%EA%B0%84_%EC%84%B8%EC%85%98_%EA%B3%B5%EC%9C%A0

Last update: 2024/04/09 08:00

