

**EAP 7**

..... 3

..... 3

..... 4




# EAP 7


JavaEE Servlet

HttpSession Object

가

 **Session Scope** HttpSession objects must be scoped at the application (or servlet context) level.

가

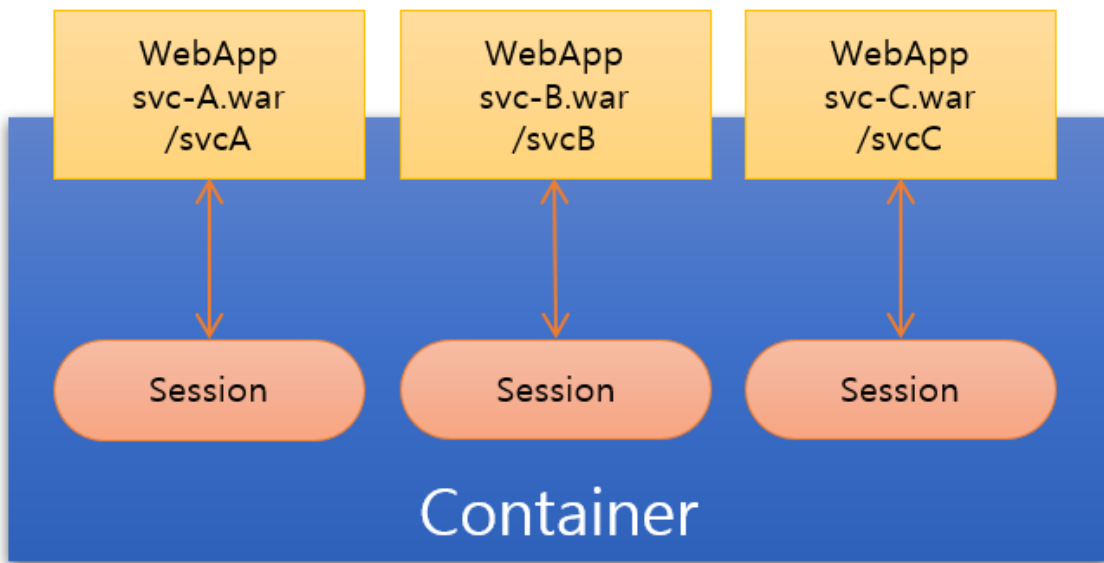

( 가 )

JavaEE Spec

가

WAS

(Session Clustering)

가

WAS

JavaEE Spec

JBoss EAP 7

config

EAR jboss-all.xml shared-session-

```
<jboss xmlns="urn:jboss:1.0">
  <shared-session-config xmlns="urn:jboss:shared-session-config:1.0">
    <session-config>
      <cookie-config>
        <path>/</path>
      </cookie-config>
    </session-config>
  </shared-session-config>
</jboss>
```

config:2.0 : <distributed/> shared-session-

```
<jboss xmlns="urn:jboss:1.0">
  <shared-session-config xmlns="urn:jboss:shared-session-config:2.0">
    <session-config>
      <cookie-config>
        <path>/</path>
      </cookie-config>
    </session-config>
    <distributed/>
  </shared-session-config>
</jboss>
```

- <https://access.redhat.com/solutions/18530>
- <https://access.redhat.com/solutions/2600141>
- [https://access.redhat.com/documentation/en-us/red\\_hat\\_jboss\\_enterprise\\_application\\_platform/7.4/html/development\\_guide/class\\_loading\\_and\\_modules#configuring\\_session\\_sharing\\_between\\_subdeployments\\_in\\_enterprise\\_archives](https://access.redhat.com/documentation/en-us/red_hat_jboss_enterprise_application_platform/7.4/html/development_guide/class_loading_and_modules#configuring_session_sharing_between_subdeployments_in_enterprise_archives)

