

<b>JBoss EAP 6.x Global Module</b>	.....	3
	.....	3
<b>module.xml</b>	.....	3
<b>Global module</b>	.....	4
<b>1. WEB GUI</b>	.....	4
<b>2. Configuration</b>	.....	5
	.....	5



— 2015/07/29 11:04

# **JBoss EAP 6.x Global Module**

## JBoss Global Module Standalone      Domain modules

가

## Deployment

Oracle JDBC Driver global modules

ojdbc.jar JBoss  
module modules/system/layers/base/  
**com/oracle/jdbc**

|Boss EAP 6.x

```
[user@host ~]$ mkdir $JBoss_HOME/modules/system/layers/base/com/oracle/jdbc
```

main

```
[user@host ~]$ mkdir  
$JBoss_HOME/modules/system/layers/base/com/oracle/jdbc/main
```

oracle.jar . jar

`$JBoss_HOME/modules/system/layers/base/com/oracle/jdbc/main/ojdbc.jar`

# module.xml

jar

```
[user@host ~]$ vim  
$JBOSS_HOME/modules/system/layers/base/com/oracle/jdbc/main/module.xml
```

module.xml

```
<?xml version="1.0" encoding="UTF-8"?>
<module xmlns="urn:jboss:module:1.1" name="com.oracle.jdbc">
    <resources>
```

Last update: 2015/07/29 jboss\_eap\_6.x\_global\_module\_ 가 https://atl.kr/dokuwiki/doku.php/jboss\_eap\_6.x\_global\_module\_%EC%B6%94%EA%B0%80 02:04

```
<resource-root path="ojdbc.jar"/>
</resources>
</module>
```

# Global module

가


Global Module

가 가 WEB GUI

JBoss EAP 6.x

Configuraion

## 1. WEB GUI

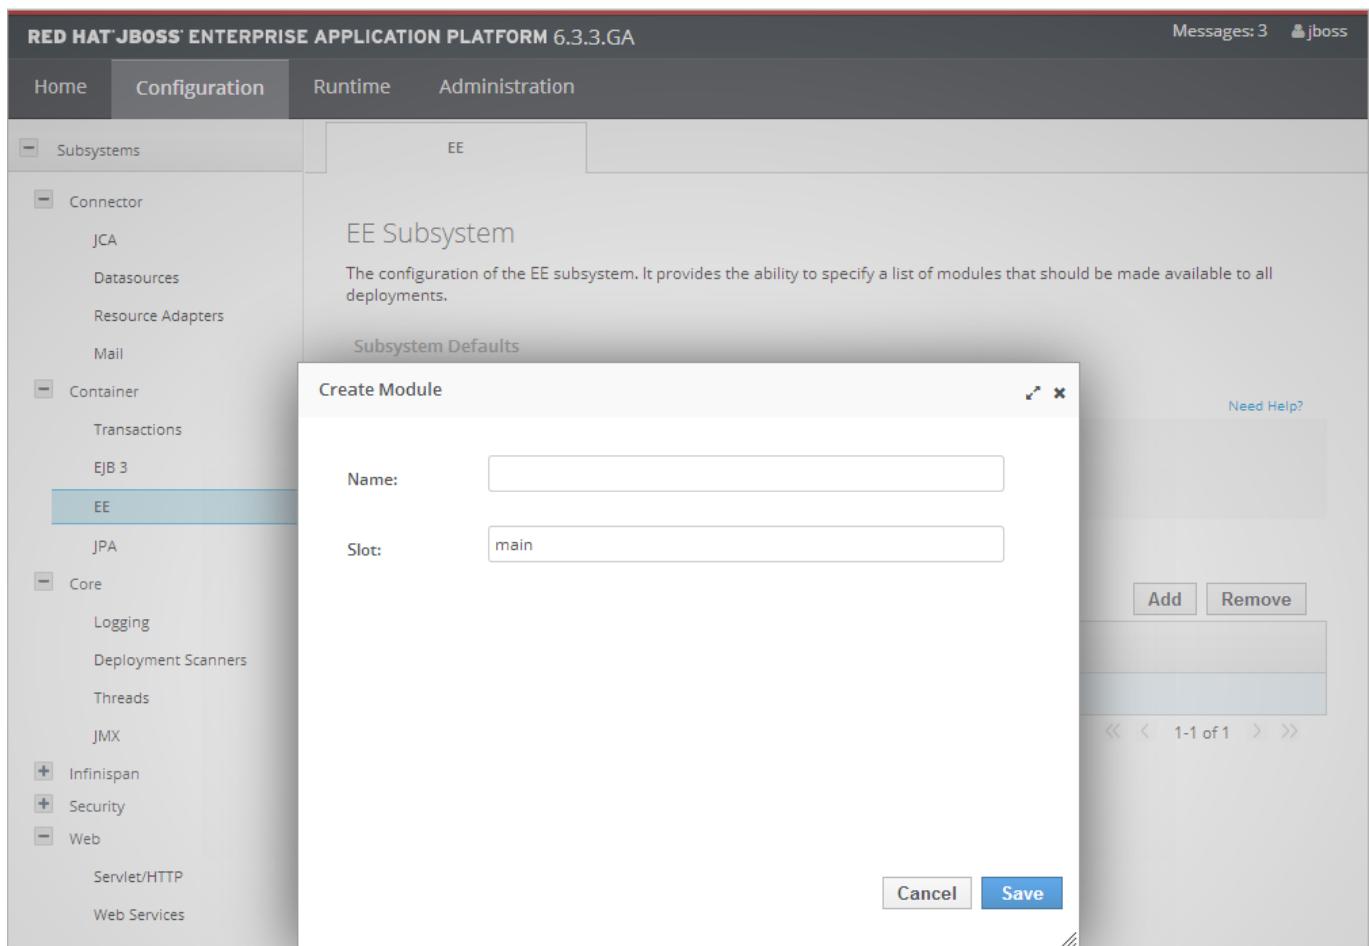

The screenshot shows the JBoss EAP 6.3.3.GA configuration interface. The top navigation bar includes Home, Configuration (selected), Runtime, and Administration. The left sidebar lists Subsystems (Connector, DataSources, Resource Adapters, Mail), Container (Transactions, EJB 3, EE, JPA), and Core (Logging, Deployment Scanners, Threads, JMX). The main panel displays the EE Subsystem configuration, which provides the ability to specify a list of modules available to all deployments. A modal dialog titled "Create Module" is open, prompting for a Name (empty) and Slot (set to "main"). Buttons for Add, Remove, and Save are visible at the bottom of the dialog.

WEB GUI      Configuraion - Container - EE - Add

```
Name : com.oracle.jdbc
Slot : main
```

## 2. Configuration

standalone.xml      domain.xml

```
<subsystem xmlns="urn:jboss:domain:ee:1.2">
  <global-modules>
    <module name="com.oracle.jdbc" slot="main"/>
  </global-modules>
  ...
  ...
```

RedHat Document

- [https://access.redhat.com/documentation/en-US/JBoss\\_Enterprise\\_Application\\_Platform/6.4/html/Administration\\_and\\_Configuration\\_Guide/chap-Configuring\\_Modules.html](https://access.redhat.com/documentation/en-US/JBoss_Enterprise_Application_Platform/6.4/html/Administration_and_Configuration_Guide/chap-Configuring_Modules.html)
- <https://access.redhat.com/solutions/195403>

From:  
<https://atl.kr/dokuwiki/> - AllThatLinux!



Permanent link:

[https://atl.kr/dokuwiki/doku.php/jboss\\_eap\\_6.x\\_global\\_module\\_%EC%B6%94%EA%B0%80](https://atl.kr/dokuwiki/doku.php/jboss_eap_6.x_global_module_%EC%B6%94%EA%B0%80)

Last update: **2015/07/29 02:04**