


- KVM**    **fence\_virt**    ..... 3
- ..... 3
- Fence**    ..... 3
- ..... 3
- ..... 4
- ..... 4
- ..... 4
- fence\_virt    ..... 5
- Guest OS    ..... 5
- cluster.conf ..... 6
- ..... 7
- ..... 7



# KVM fence\_virt

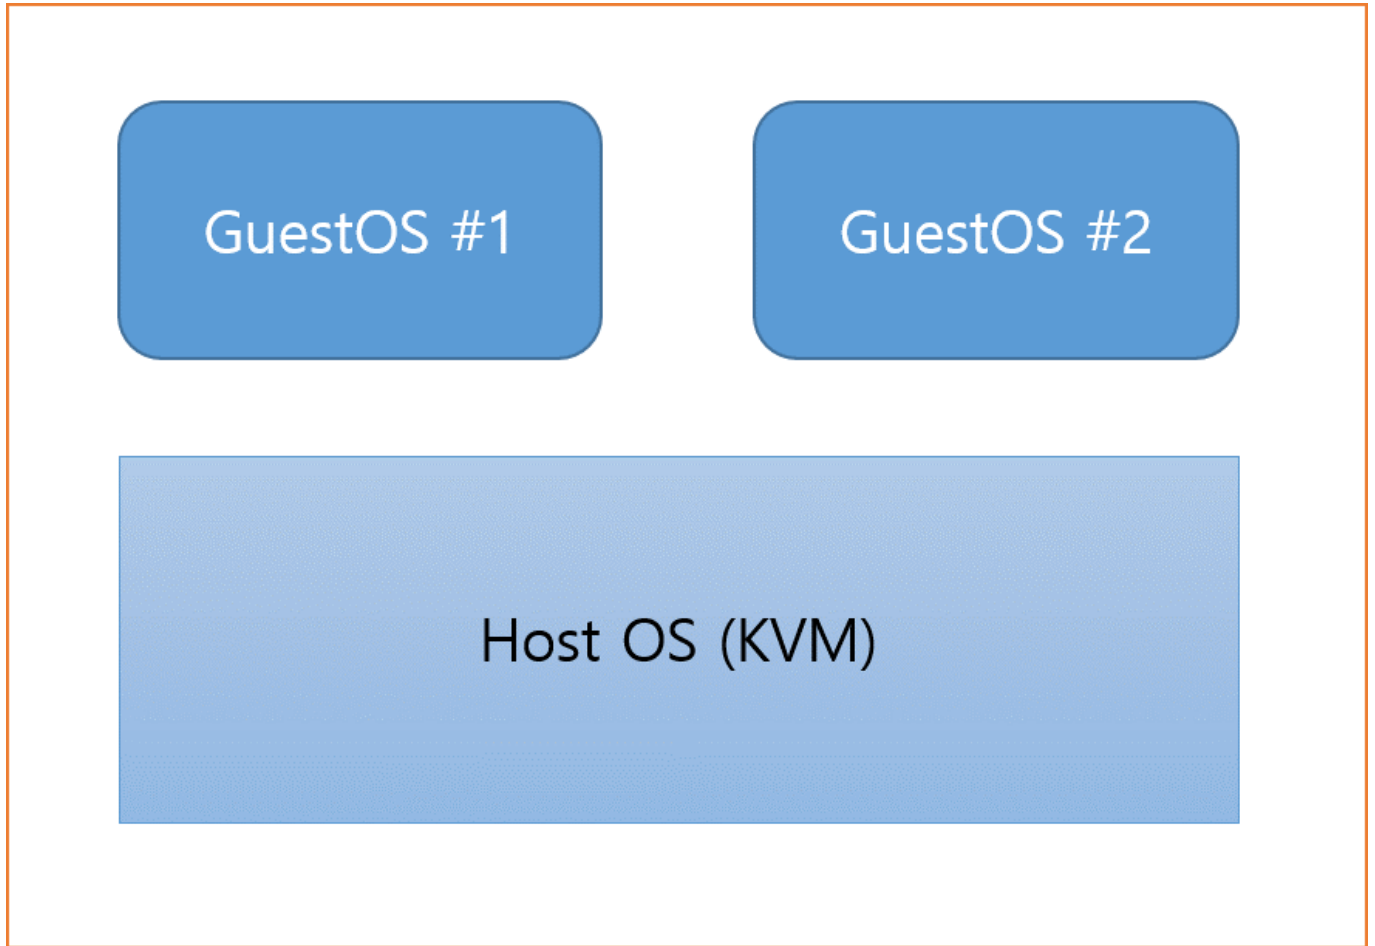

GuestOS HostOS 1 (가 ) KVM 2 Guest OS  
 fence\_virtd . .

## Fence

가 fence( ) . .

HostOS .

```
# yum install fence-virt fence-virt d fence-virt d-libvirt fence-virt d-
multicast fence-virt d-serial
```

가 /etc/cluster 가

```
# mkdir -p /etc/cluster
```



Host OS 가

HostOS

key

Host OS

```
# dd if=/dev/urandom of=/etc/cluster/fence_xvm.key bs=4k count=1
# scp /etc/cluster/fence_xvm.key root@guest:/etc/cluster/fence_xvm_host1.key
```

HostOS

GuestOS

Host OS

```
# fence_virt -c
```

```
•
•
•
•
• br0 ( )
• default fence_xvm.key
• libvirt
• URI
• "y"
/etc/fence_virt.conf
```

```
fence_virt {
    module_path = "/usr/lib64/fence-virt";
    listener = "multicast";
}
```

```

    backend = "libvirt";
}

listeners {
    # . Guest OS cluster.conf

    # cluster.conf

    multicast {
        key_file = "/etc/cluster/fence_xvm.key";
        interface = "br0";
        port = "1229";
        address = "225.0.0.12";
        family = "ipv4";
    }
}

backends {
    libvirt {
        uri = "qemu:///system";
    }
}

```

Host OS      multicast address      .      Host OS

```

(on host1)
address = "225.0.1.12";

(on host2)
address = "225.0.2.12";

```

## fence\_virt

```

# service fence_virt start
# chkconfig fence_virt on

```

## Guest OS

```

# yum install fence-virt

```

Guest OS      가

```

[on guest1]$ fence_xvm -a 225.0.2.12 -k /etc/cluster/fence_xvm-host2.key -H

```

```
guest2 -o status
[on guest2]$ fence_xvm -a 225.0.1.12 -k /etc/cluster/fence_xvm_host1.key -H
guest1 -o status
```

```
[on guest2]# fence_xvm -o reboot -a 225.0.1.12 -k
/etc/cluster/fence_xvm_host1.key -H guest1
```

```
-H                    Guest OS                    KVM                    가
HostOS    virsh list                    가
```

```
[on host1]# virsh list
 Id Name                    State
-----
 1 guest1                    running
```

## cluster.conf

가      cluster.conf

```
[root@node2 ~]# cat /etc/cluster/cluster.conf
<?xml version="1.0"?>
<cluster config_version="1" name="kvm_cluster">
  <clusternodes>
    <clusternode name="node1.example.com" nodeid="1">
      <fence>
        <method name="1">
          <device domain="node1" name="virtfence1"/>
        </method>
      </fence>
    </clusternode>
    <clusternode name="node2.example.com" nodeid="2">
      <fence>
        <method name="1">
          <device domain="node2" name="virtfence2"/>
        </method>
      </fence>
    </clusternode>
  </clusternodes>
  <cman expected_votes="1" two_node="1"/>
  <fencedevices>
    <!-- key_file                    multicast_address
         /etc/cluster/fence_xvm.key    225.0.0.12 -->
```

```
<fencedevice agent="fence_xvm" name="virtfence1"
key_file="/etc/cluster/fence_xvm_host1.key" multicast_address="225.0.1.12"/>
<fencedevice agent="fence_xvm" name="virtfence2"
key_file="/etc/cluster/fence_xvm_host2.key" multicast_address="225.0.2.12"/>
</fencedevices>
<rm>
  <failoverdomains/>
  <resources/>
</rm>
</cluster>
```

```
[on guest2]$ fence_node guest1
fence guest1 success
```

- <https://access.redhat.com/solutions/293183>

From:  
<https://atl.kr/dokuwiki/> - AllThatLinux!

Permanent link:  
[https://atl.kr/dokuwiki/doku.php/kvm\\_%EA%B8%B0%EB%B0%98\\_fence\\_virt\\_%EC%84%A4%EC%A0%95%ED%95%98%EA%B8%B0?rev=1515045250](https://atl.kr/dokuwiki/doku.php/kvm_%EA%B8%B0%EB%B0%98_fence_virt_%EC%84%A4%EC%A0%95%ED%95%98%EA%B8%B0?rev=1515045250)

Last update: 2018/01/04 05:54

