


- KVM** **fence_virt** 3
- 3
- Fence** 3
- 3
- 4
- 4
- 4
- fence_virt 5
- Guest OS 5
- cluster.conf 6
- 7
- 7

KVM fence_virt

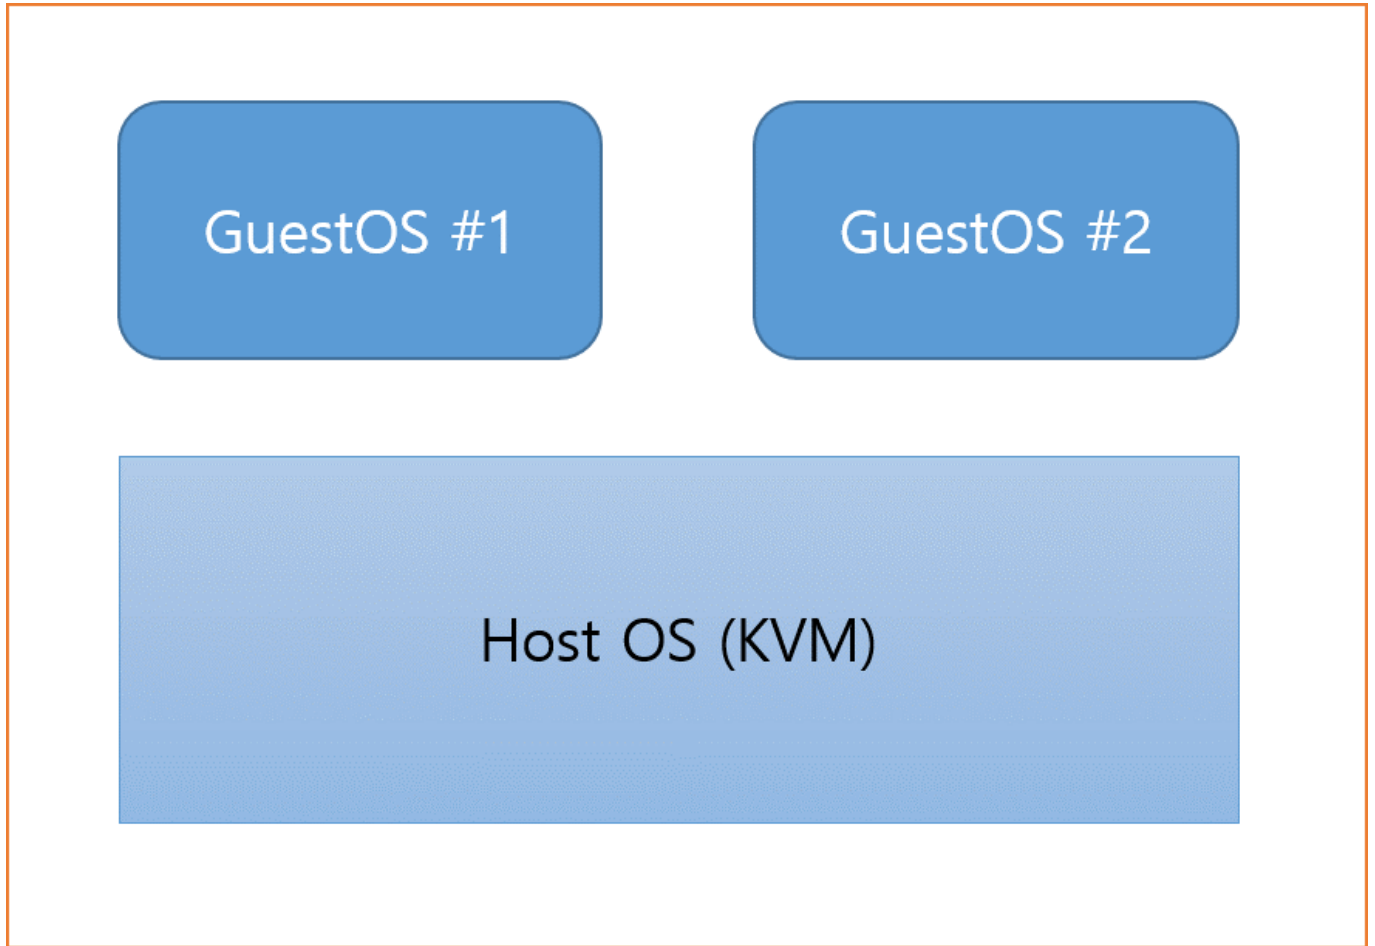

GuestOS HostOS 1 (가) KVM 2 Guest OS
 fence_virtd . . .

Fence

가 fence() . . .

HostOS .

```
# yum install fence-virt fence-virt d fence-virt d-libvirt fence-virt d-
multicast fence-virt d-serial
```

가 /etc/cluster 가

```
# mkdir -p /etc/cluster
```



Host OS

가

HostOS

key

Host OS

```
# dd if=/dev/urandom of=/etc/cluster/fence_xvm.key bs=4k count=1
# scp /etc/cluster/fence_xvm.key root@guest:/etc/cluster/fence_xvm_host1.key
```

HostOS

GuestOS

Host OS

```
# fence_virt -c
```

-
-
-
-
- br0 ()
- default fence_xvm.key
- libvirt
- URI
- "y"

/etc/fence_virt.conf

```
fence_virt {
    module_path = "/usr/lib64/fence-virt";
    listener = "multicast";
}
```

```
    backend = "libvirt";
}

listeners {
    # . Guest OS cluster.conf

    # cluster.conf

    multicast {
        key_file = "/etc/cluster/fence_xvm.key";
        interface = "br0";
        port = "1229";
        address = "225.0.0.12";
        family = "ipv4";
    }
}

backends {
    libvirt {
        uri = "qemu:///system";
    }
}
```

Host OS multicast address . Host OS

```
(on host1)
address = "225.0.1.12";

(on host2)
address = "225.0.2.12";
```

fence_virt

```
# service fence_virt start
# chkconfig fence_virt on
```

Guest OS

```
# yum install fence-virt
```

Guest OS 가

```
[on guest1]$ fence_xvm -a 225.0.2.12 -k /etc/cluster/fence_xvm-host2.key -H
```

```
guest2 -o status
[on guest2]$ fence_xvm -a 225.0.1.12 -k /etc/cluster/fence_xvm_host1.key -H
guest1 -o status
```

```
[on guest2]# fence_xvm -o reboot -a 225.0.1.12 -k
/etc/cluster/fence_xvm_host1.key -H guest1
```

-H	Guest OS	KVM	가
HostOS	virsh list	가	.

```
[on host1]# virsh list
Id Name State
-----
1 guest1 running
```

cluster.conf

domain	vm	가
--------	----	---

```
[root@rhcs1 ~]# fence_xvm -o list
rhcs61 84cbf968-2ffc-437c-b9a6-3b3c9465239d on
rhcs62 f9038eec-a6f8-4df7-aa69-533744cb28ba on
```

가	cluster.conf	.
---	--------------	---

```
[root@node2 ~]# cat /etc/cluster/cluster.conf
<?xml version="1.0"?>
<cluster config_version="1" name="kvm_cluster">
  <clusternodes>
    <clusternode name="node1.example.com" nodeid="1">
      <fence>
        <method name="1">
          <!-- domain VM . -->
          <device domain="rhcs61" name="virtfence1"/>
        </method>
      </fence>
    </clusternode>
    <clusternode name="node2.example.com" nodeid="2">
      <fence>
        <method name="1">
```

```
        <device domain="rhcs62" name="virtfence2"/>
      </method>
    </fence>
  </clusternode>
</clusternodes>
<cman expected_votes="1" two_node="1"/>
<fencedevices>
  <!-- key_file      multicast_address
      /etc/cluster/fence_xvm.key  225.0.0.12 -->
  <fencedevice agent="fence_xvm" name="virtfence1"
key_file="/etc/cluster/fence_xvm_host1.key" multicast_address="225.0.1.12"/>
  <fencedevice agent="fence_xvm" name="virtfence2"
key_file="/etc/cluster/fence_xvm_host2.key" multicast_address="225.0.2.12"/>
</fencedevices>
<rm>
  <failoverdomains/>
  <resources/>
</rm>
</cluster>
```

```
[on guest2]$ fence_node guest1
fence guest1 success
```

- <https://access.redhat.com/solutions/293183>

From:
<https://atl.kr/dokuwiki/> - AllThatLinux!

Permanent link:
https://atl.kr/dokuwiki/doku.php/kvm_%EA%B8%B0%EB%B0%98_fence_virt_%EC%84%A4%EC%A0%95%ED%95%98%EA%B8%B0?rev=1515046384

Last update: 2018/01/04 06:13

