

- RoundCube QuickStart** 3
- 3
- 3
- 3
- 3
- /etc/apache2/conf-available/roundcube.conf 4
- Roundcube Installer 4
- Roundcube** 6

— 2015/07/29 10:31

RoundCube QuickStart

Debian 8 (jessie)
가

RoundCube

TT

가

- <https://roundcube.net/>
- 가
- PHP
- MySQL

Apache HTTPD

Debian 8(Jessie)

MariaDB

MariaDB

PHP, MariaDB

```
[user@host]# apt-get install apache2 phpmyadmin php5-gd php5-intl php5-ldap mariadb-client mariadb-server
```

가 Roundcube

/var/www

```
[user@host]# tar -xvzf roundcubemail-1.1.2-complete.tar.gz
[user@host]# ln -s roundcubemail-1.1.2 roundcube
[user@host]# chown -R www-data.www-data roundcube*
[user@host]# ll
4512
drwxr-xr-x  4 root    root      4096  7  28 10:51 ./
drwxr-xr-x 12 root    root      4096  7  28 09:55 ../
drwxr-xr-x  2 root    root      4096  7  28 09:55 html/
lrwxrwxrwx  1 www-data www-data    19  7  28 10:51 roundcube ->
roundcubemail-1.1.2/
drwxr-xr-x 12 www-data www-data    4096  6  5 21:47 roundcubemail-1.1.2/
-rw-r--r--  1 root    root     4599935  6  5 22:16 roundcubemail-1.1.2-
complete.tar.gz
```

```
[user@host]#
```

/etc/apache2/conf-available/roundcube.conf

가 .


```
Alias /roundcube /var/www/roundcube
```

```
<Directory /var/www/roundcube>  
    Options FollowSymLinks  
</Directory>
```

```
[user@host]# a2enconf roundcube.conf  
Enabling conf roundcube.  
To activate the new configuration, you need to run:  
    service apache2 reload  
[user@host]# service apache2 reload  
[user@host]#
```

Roundcube Installer

roundcube .

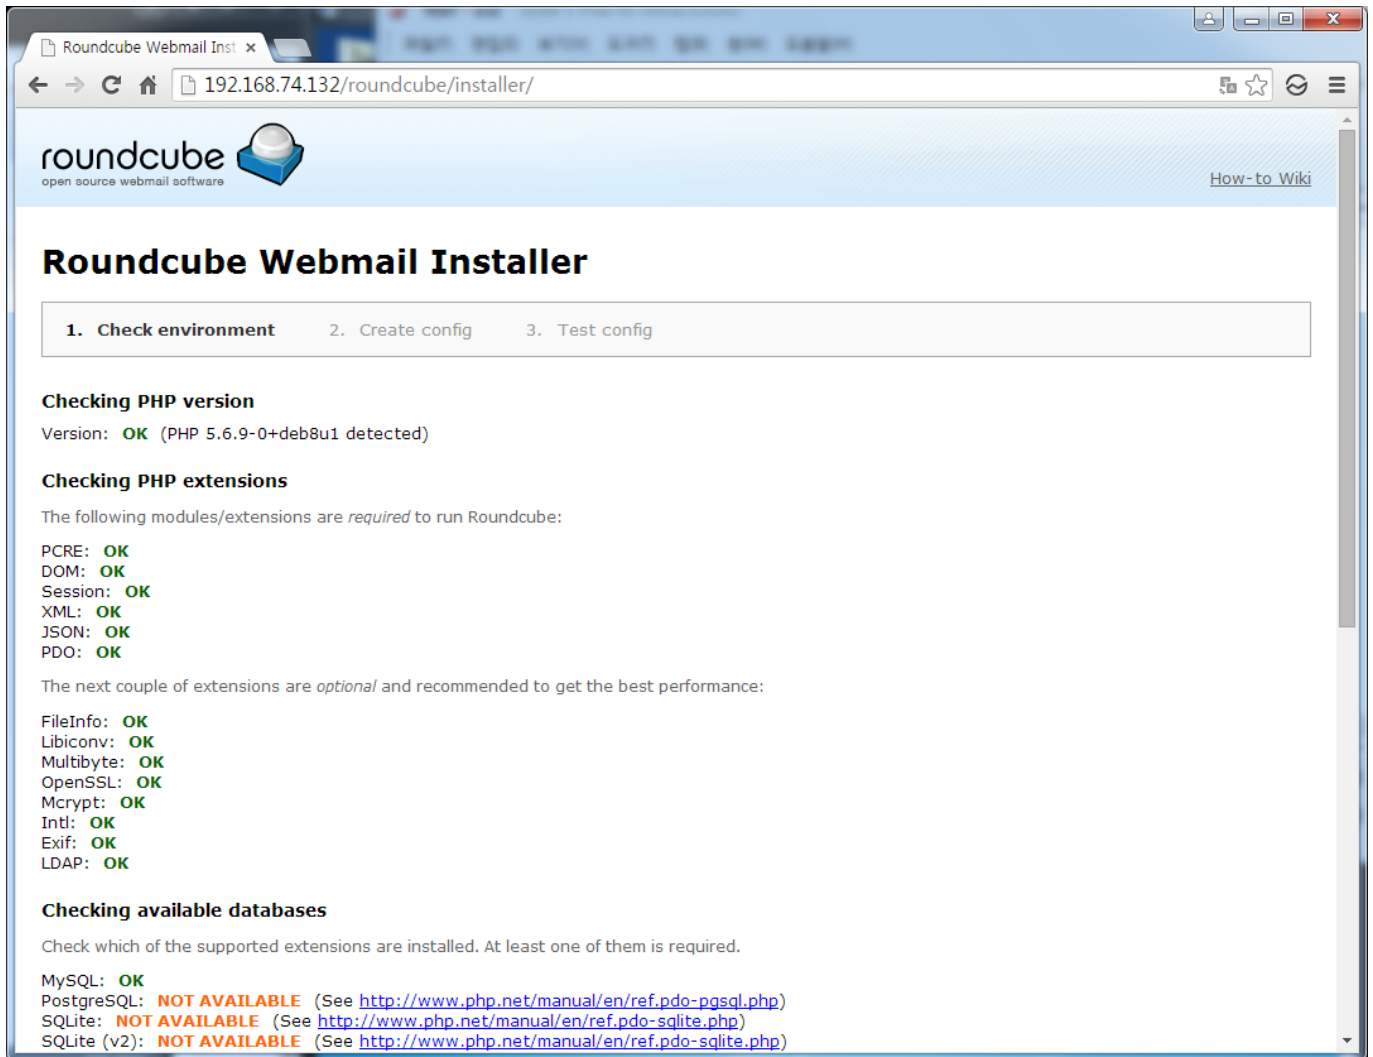

date.timezone

The following settings are *optional* and recommended:

allow_url_fopen: **OK**
date.timezone: **NOT OK** (not set)
register_globals: **OK**

/etc/php5/apache2/php.ini

```
root@mail:~# vim /etc/php5/apache2/php.ini
```

```
[Date]
; Defines the default timezone used by the date functions
; http://php.net/date.timezone
date.timezone = Asia/Seoul
```

```
[user@host]# service apache2 reload
```


The following settings are *optional* and recommended:

allow_url_fopen: **OK**
date.timezone: **OK**
register_globals: **OK**

OK

NEXT

Roundcube

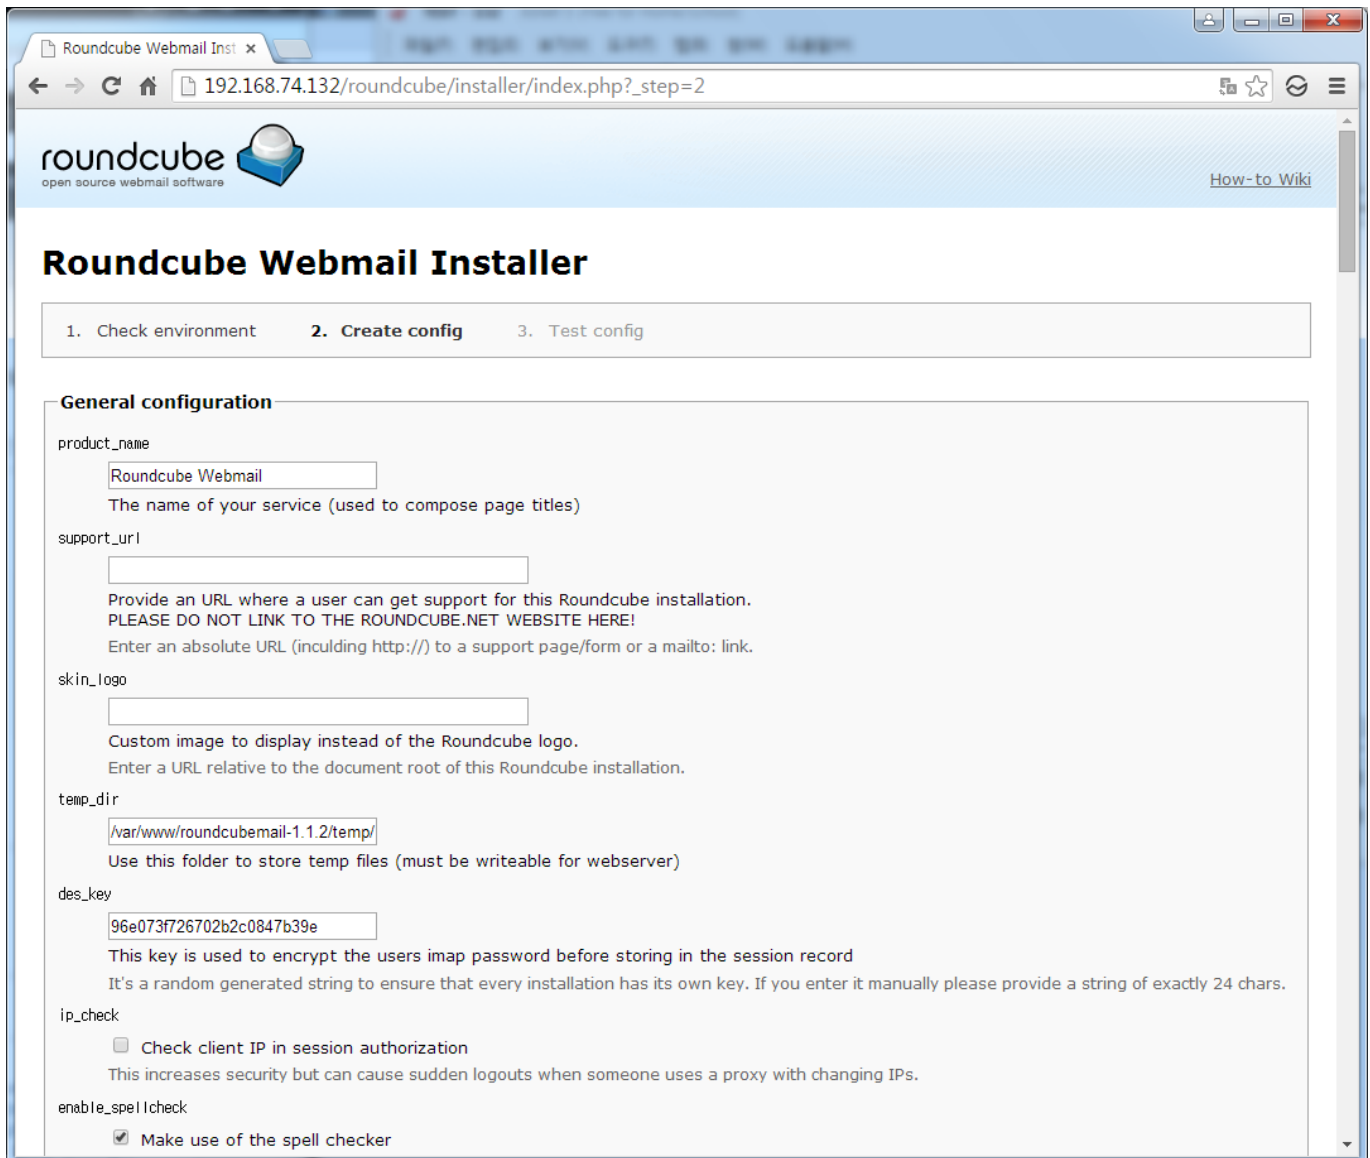

MySQL DB

DB

create config

http://SERVER_ADDRESS/roundcube

From:

<https://atl.kr/dokuwiki/> - **AllThatLinux!**

Permanent link:

https://atl.kr/dokuwiki/doku.php/roundcube_quickstart

Last update: **2015/07/29 01:31**

