

**Session Recording tlog** ..... 3

**tlog** ..... 3

  CLI       SSSD ..... 3

  WebUI     SSSD ..... 4

  SSSD ..... 4

          ..... 5

          ..... 6

          ..... 6

  tlog-play ..... 6

  tlog-play ..... 6

          ..... 7





- none
- some
- all

some

(,)

가

```
[session_recording]
scope = some
users = example1, example2
groups = examples
```


### WebUI

### SSSD

- localhost:9090 <IP\_ADDRESS>:9090 RHEL 8
- RHEL 8



- 
- 
- 
- 



- SSSD

SSSD Configuration

Scope

Users

Groups

### SSSD

SSSD

/usr/bin/tlog-rec-session



RHEL 8

SSSD

tlog-rec-session.conf

SSSD

`/usr/bin/tlog-rec-session`

```
# chsh <user_name>
Changing shell for <user_name>.
New shell [</old/shell/location>]
```

`systemd-journal-remote`

```
# yum install systemd-journal-remote
```


`journalctl -o export`

```
# journalctl -o export | systemd-journal-remote -o /tmp/dir/example.journal
-
```

```
가 /var/log/journal/
/var/log/journal/remote/
```

# 가 RHEL 8 cockpit tlog-play

## RHEL 8 가

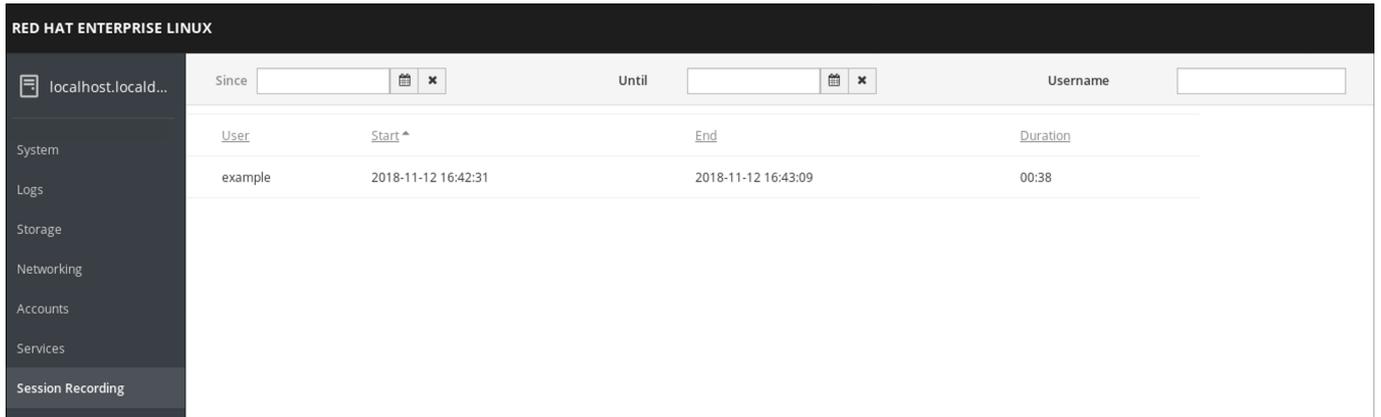

## tlog-play

```

tlog-rec
tlog-play
tlog-play /usr/local/etc/tlog/tlog-play.conf
tlog-play
  
```

## tlog-play

Systemd Journal

```
# tlog-play --reader=file --file-path=tlog.log
```

```
# tlog-play -r journal -M TLOG-REC=<your-unique-host-id>
```

tlog-play

- [https://access.redhat.com/documentation/en-us/red\\_hat\\_enterprise\\_linux/8/html/recording\\_sessions/](https://access.redhat.com/documentation/en-us/red_hat_enterprise_linux/8/html/recording_sessions/)

From:

<https://atl.kr/dokuwiki/> - **AllThatLinux!**

Permanent link:

[https://atl.kr/dokuwiki/doku.php/session\\_recording\\_tlog](https://atl.kr/dokuwiki/doku.php/session_recording_tlog)

Last update: **2019/05/15 09:10**

