

Session Recording tlog 3

tlog 3

 CLI SSSD 3

 WebUI SSSD 4

 SSSD 4

 5

 6

 6

 tlog-play 6

 "tlog-play" 6

 7

- none
- some
- all

some

(,)


가

```
[session_recording]
scope = some
users = example1, example2
groups = examples
```


WebUI

SSSD

- localhost:9090 <IP_ADDRESS>:9090 RHEL 8
- RHEL 8

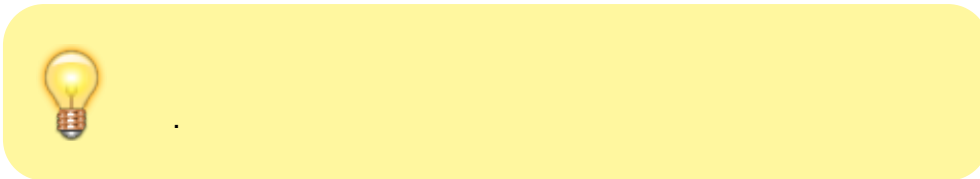

-
-
-
-



- SSSD

SSSD Configuration

Scope

Users

Groups

SSSD

SSSD

/usr/bin/tlog-rec-session



RHEL 8

SSSD

tlog-rec-session.conf

SSSD

`/usr/bin/tlog-rec-session`

```
# chsh <user_name>
Changing shell for <user_name>.
New shell [</old/shell/location>]
```

`systemd-journal-remote`

```
# yum install systemd-journal-remote
```

`journalctl -o export`

```
# journalctl -o export | systemd-journal-remote -o /tmp/dir/example.journal
-
```

```
가 /var/log/journal/
/var/log/journal/remote/
```



```
# tlog-play -r journal -M TLOG-REC=<your-unique-host-id>
```

tlog-play

- https://access.redhat.com/documentation/en-us/red_hat_enterprise_linux/8/html/recording_sessions/

From:

<https://atl.kr/dokuwiki/> - **AllThatLinux!**

Permanent link:

https://atl.kr/dokuwiki/doku.php/session_recording_tlog?rev=1557911337

Last update: **2019/05/15 09:08**

